

SPECIFICATIONS									
Model	Lifting Capacity	Lifting Height	Lifting Time	Overall Height	Overall Width	Drive Thru Clearance	Width Between Columns	Minimum Pad Height	Motor
PK3.70H	H 3700Kg	1815 - 2044mm	52 Seconds	4231 / 4431mm	3428mm	2528mm	2850mm	115mm/ 90mm with short drop in pads (optional)	2.2KW 3.0HP

FEATURES

3700Kg Capacity Clear floor Dual hydraulic direct-drive cylinders Single point safety release with dual safety design Overhead safety shut off device Super symmetric arm design Automatic arm locks Combination screw pads with 115mm minimum height Optional short drop in pads available with 90mm minimum height

Tufflift Hoists Australia


 Head Office 46 Saintly Drive, Truganina, VIC 3029
 Phone
 +61 3 8375 3600

 Fax +61 3 8353 2525
 Email sales@tufflift.com.au
 Freecall 1800 88 33 50

Stackable adapters and hydraulic oil included Installation service available subject to location 2 Year hydraulic, electrical and mechanical warranty 5 Year structural warranty Australian Standards Certification Worksafe Design Registration



www.Tufflift.com.au

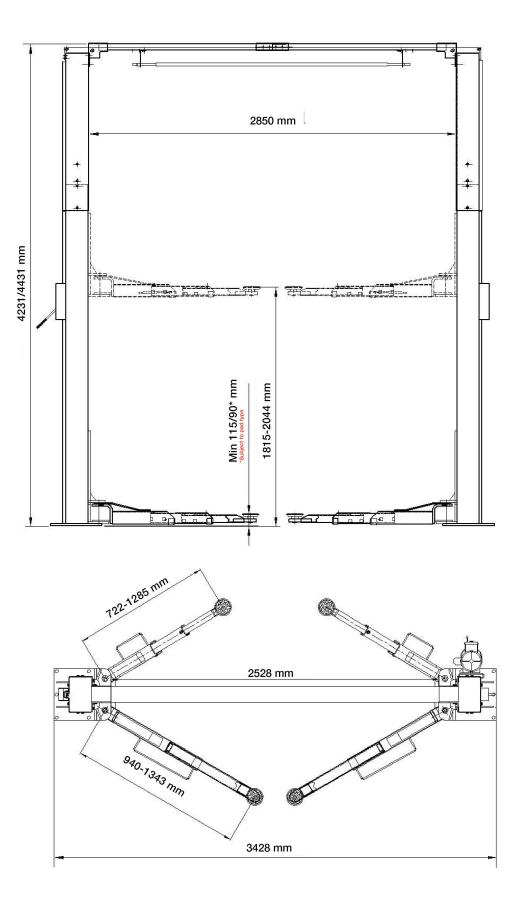

III

HI.

www.Tufflift.com.au