

Wheel Alignment Scissor Lift NBS40

revolution[®]



Shown: NBS40AL-45

RAL5005

RAL7040

SPECIFICATION


TYPE	NBS40AL-45	NBS40A-45	NBS40-45	NBS40AL-48	NBS40A-48	NBS40-48
Capacity	4000 kg	4000 kg	4000 kg	4000 kg	4000 kg	4000 kg
Lifting Height	1920 mm	1920 mm	1870 mm	1920 mm	1920 mm	1870 mm
Lifting-table Height	400 mm	-	-	400 mm	-	-
Lowered Height	345 mm	345 mm	280 mm	345 mm	345 mm	280 mm
Overall Length	4989 mm	4989 mm	4989 mm	5289 mm	5289 mm	5289 mm
Overall Width	2206 mm	2206 mm	2206 mm	2206 mm	2206 mm	2206 mm
Runway Length	4500 mm	4500 mm	4500 mm	4800 mm	4800 mm	4800 mm
Runway Width	625 mm	625 mm	625 mm	625 mm	625 mm	625 mm
Lifting-table Length	1400-2100 mm	-	-	1400-2100 mm	-	-
Motor Performance	3 kW	3 kW	3 kW	3 kW	3 kW	3 kW
Electrical Connection	3PH 380V 50Hz	3PH 380V 50Hz	3PH 380V 50Hz	3PH 380V 50Hz	3PH 380V 50Hz	3PH 380V 50Hz
Air Pressure	6-8 bar	6-8 bar	6-8 bar	6-8 bar	6-8 bar	6-8 bar
Lifting-table Cap.	3000 kg	-	-	3000 kg	-	-

CONFIGURATION

MODEL	CONFIGURATION
NBS40AL-45	Alignment Kit/Lifting-table
NBS40A-45	Alignment Kit
NBS40-45	Flat Platform
NBS40AL-48	Alignment Kit/Lifting-table
NBS40A-48	Alignment Kit
NBS40-48	Flat Platform

AVAILABLE OPTIONS

ITEM	MODEL
Long Ramp Kit	RMP-NBS40
Extended Ramp Kit	EXRMP-NBS40
Alignment Kit	AK-NBS40A-45
	AK-NBS40A-48
Rolling Jack	NRJ45G /NRJ45G-AP

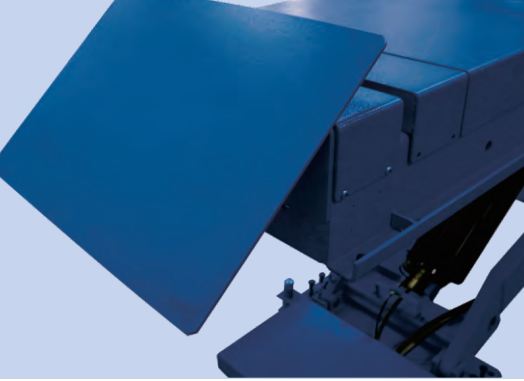

Inground design enables the platform to flush with the ground; adjustable active plates are suitable for vehicles of different wheel bases.

Integrated limit switch controls high lift positions, guaranteeing the accuracy of axle measurement and safe use.

Intuitive, easy to use control console design.

Features:

1. Configurations for different demands;
2. Advanced Master-Slave hydraulic system;
3. Manual operation to lower in case of power cut;
5. Open front and rear with no structural connection between platforms or bases increases work area for technicians;
4. The upper limit and lower limit improve operating security;
6. Advanced electron-hydraulic control technology makes the lift easy to operate and maintain;
7. Reliable, high quality composite bearings provide maintenance free operation.



Shown: NBS40AL-45

Easy to adjust platform extensions adapt for a wide range of vehicle lengths.

Upper limit can avoid the cylinder stuck and vehicle shaking.

Lower limit can protect the technicians from injuries.

