


GEODYNA® 7600L

- GOLD graphical user interface with touch screen functions
 - easyWEIGHT™
 - Semi-automatic input of rim diameter and offset with gauge arm
 - Automatic input of rim width via Smart Sonar™
 - easyALU™
 - Rim lighting
 - VPM measurement technique
 - Constant rotational speed
 - QuickBAL™ for reduced balancing times
 - Imbalance minimisation program
 - Imbalance optimisation program
 - Split weight mode
 - The pedal-operated mechanical lock firmly holds the wheel in every position
 - Wheel clamped on the integrated flange by means of a quick nut
 - Oversize shaft
-
- **geodyna® 7600p** with Power Clamp™ device, Stop-in-position feature and electro-mechanical lock



GOLD graphical user interface with touch screen functions

Time-saving and intuitive user interface.

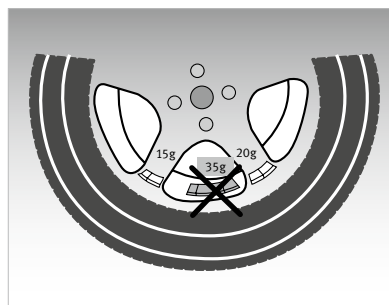

Split weight mode

Hides adhesive weights behind two adjacent spokes so they cannot be seen from the outside.