



## SPECIFICATIONS

Model	Lifting Capacity	Clearance Under Platform	Overall Length (incl. ramps)	Overall Length (excl. ramps)	Overall Width (Base Plate)	Width Between Columns	Minimum Platform Height	Motor
TLD4.0TPL5.0M	4000KG (Total)	2000mm	5277mm	4445mm	5058mm	4836mm	130mm	2.0 / 3.0 HP

### Features

- 4000kg capacity
- 240v / 15amp power
- Manual Lock Release (No compressor required)
- Installation service available
- Warranty of 5 years (structure)  
+ 1 year parts & labour (electrical, mechanical, hydraulics)
- Each hoist is built to comply with the required Australian Standards

### Includes


- Drip Trays
- Wheel Chocs
- Hydraulic Oil
- End Plates
- Anchor Bolts

### Options

- Steel Tool Tray
- RJ35 Jacking Beam
- Metal Infill Kit
- Aluminium Ramps



# TLD4.0TPL5.0M - Twin Platform 4 Post Lift

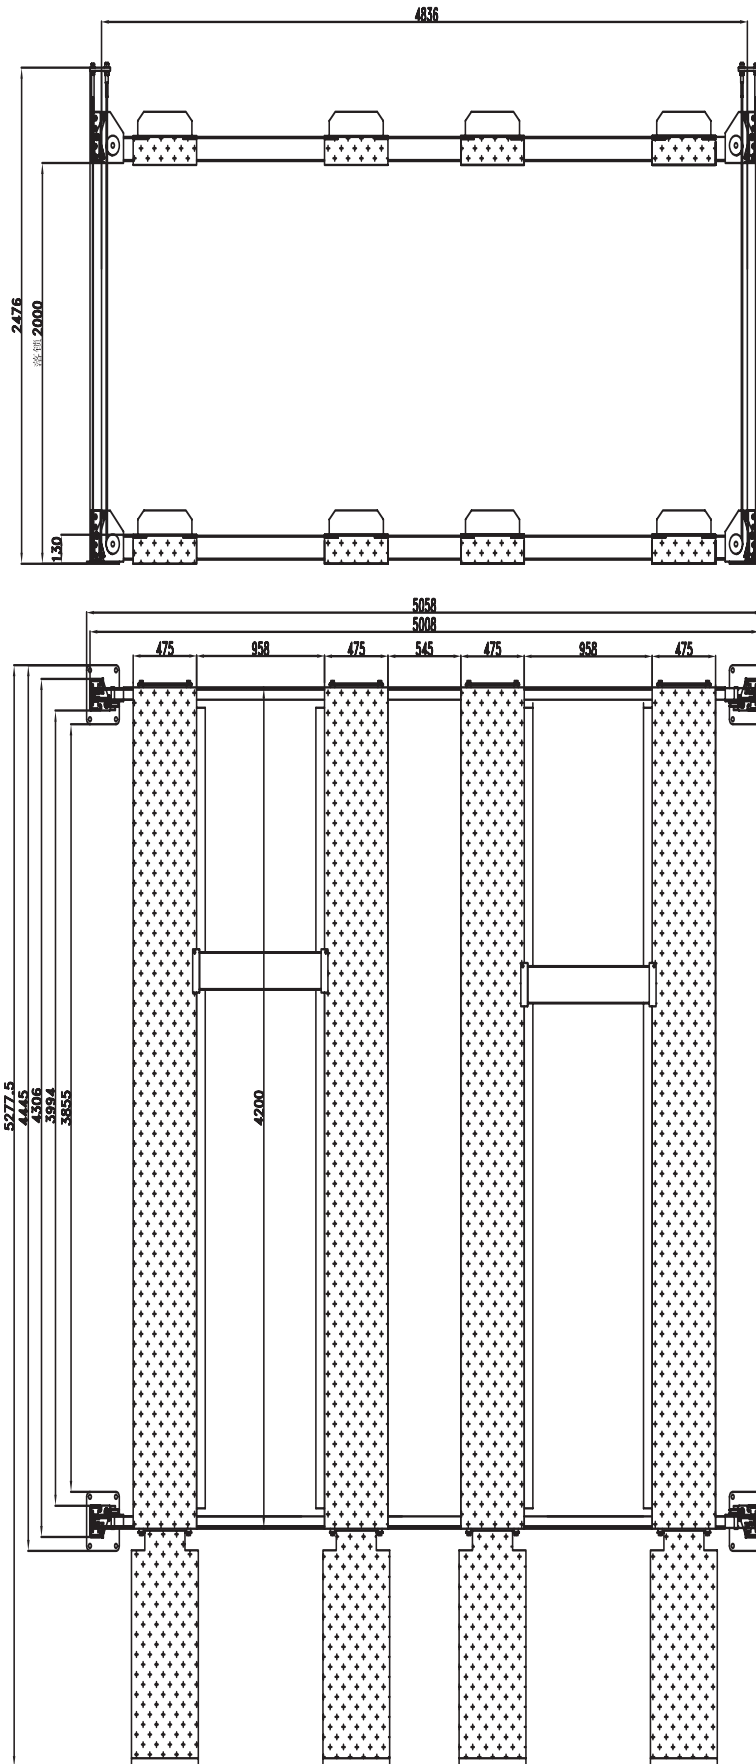

Model	PP9HW545
Overall Width	5058mm
Length of Outside Soleplate	4445mm
Overall Length	5277.5mm
Column Height	2476mm
Min. Platform Height (Upper Plane)	130mm
Max. Lifting Height (Upper Plane)	2200mm
Max. On Lock Height (Lower Plane)	2000mm
Width of Column	4836mm
Runaway Width	475mm
Length of Platform	4200mm
Maximum Lifting Weight	4000KG



HOISTS FOR EVERY SPACE