
# EFC10 | TWO POST LIFT







One Side Safety Locks Release

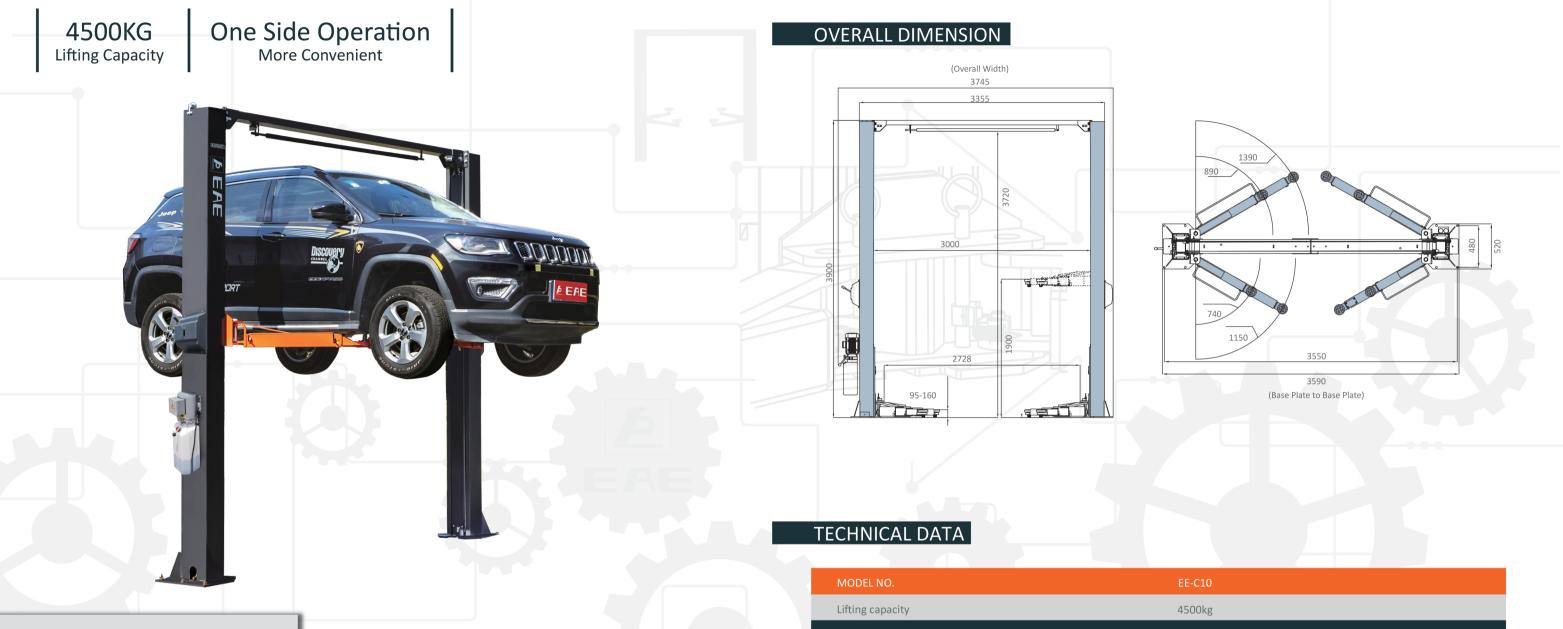



Pulley with Derailment Protection

Door Protection Pads

Strong Carriage and Arm Structure

## 

# **EE-C10**

## **TWO POST LIFT**

• 4500kg lifting capacity.

- Single side release for mechanical safety locking unit.
- Cylinder straight top device, run more smoothly.
- Durable cylinders in each column carry with anti-surge valves.
- With vehicle roof protection. The power system switches off when vehicle roof touches the rubber protected overhead bar.
- Standard door protection pads to prevent possible damage to the door opened without caution.
- Pre-fixed hydraulic pressure prevents overloading operation.
- Standard chain protection curtain.

## Max lifting height Min height Lifting time Capacity of motor **Overall Height** Drive through According Electricity supply

\* Max. Lifting height is measured with adjustable screw pads in highest position.



EE-C10	
4500kg	
1900mm	
mm-160mm	
45S-60S	
2.2kW	
3900mm	
3000mm	
To Customer Needs	