



4000KG **Lifting Capacity** One Side Operation
More Convenient





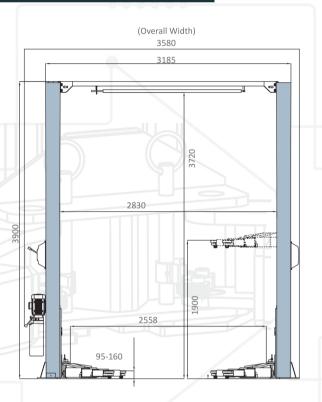

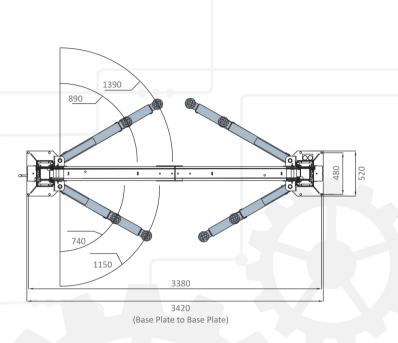



One Side Safety Locks Release



Pulley with Derailment Protection



Door Protection Pads



Strong Carriage and Arm Structure



EE-C9

TWO POST LIFT

- 4000kg lifting capacity.
- Single side release for mechanical safety locking unit.
- Cylinder straight top device, run more smoothly.
- Durable cylinders in each column carry with anti-surge valves.
- With vehicle roof protection. The power system switches off when vehicle roof touches the rubber protected overhead bar.
- Standard door protection pads to prevent possible damage to the door opened without caution.
- Pre-fixed hydraulic pressure prevents overloading operation.
- Standard chain protection curtain.

TECHNICAL DATA

MODEL NO.	EE-C9	
Lifting capacity	4000kg	
Max lifting height	1900mm	
Min height	95mm-160mm	
Lifting time	45S-60S	
Capacity of motor	2.2kW	
Overall Height	3900mm	
Drive through clearance (wheels)	2558mm	
Width Between Columns (body)	2830mm	
Electricity supply	According To Customer Needs	

^{*} Max. Lifting height is measured with adjustable screw pads in highest position