



MC kit installation Guide Manual




Due to constant change on machines, all modification would not be noticed in advance.

Specifications	12/14/16mm for Silk rod spindle
Installing hole dia.	10mm
Motoe capacity	0.25kw
Rim dia. range	10"~24"
Max. wheel width	0"~12"
Balance cycle	8s
Balance precision	±1g
Working temp	0~45°C
dBA	<70dB

COSENG MC Tire Balancing Kit could be installed on all COSENG wheel balancers and most of other brands', applicable for large and small MC tires in the markets of US, Europe, and Japan.

Chapter I Main components

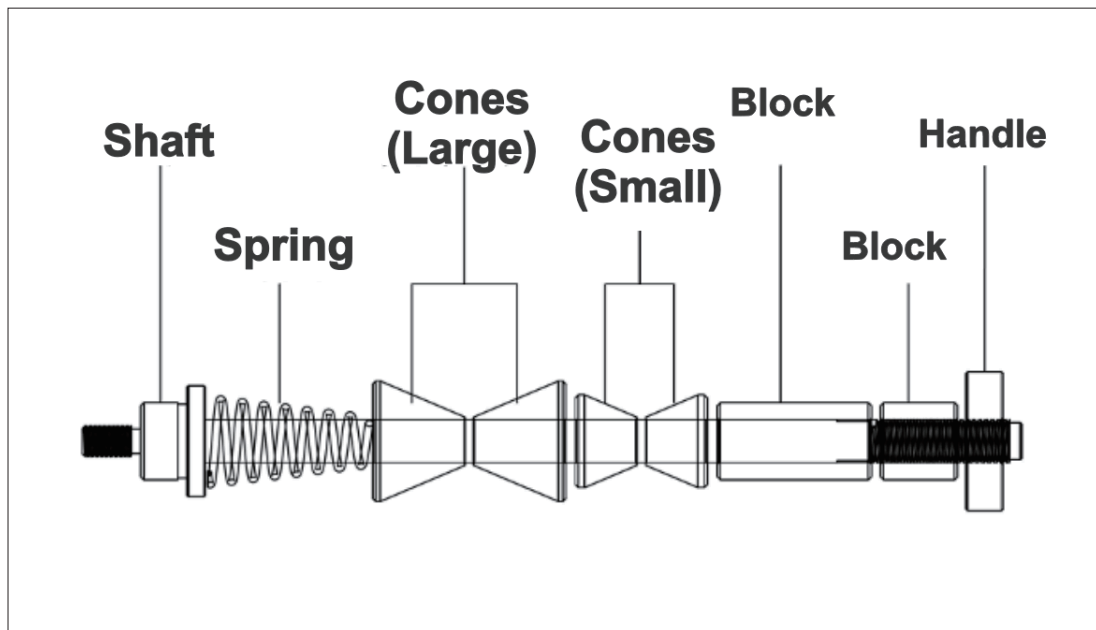


Chapter II Installation Instruction

2.1. Connect MC shaft and Main shaft assembly

2.2. Installation following by : Sponges — Spring — Cone — Wheel — Block — Handle

2.3. Based different wheels to decide the optimistic installation

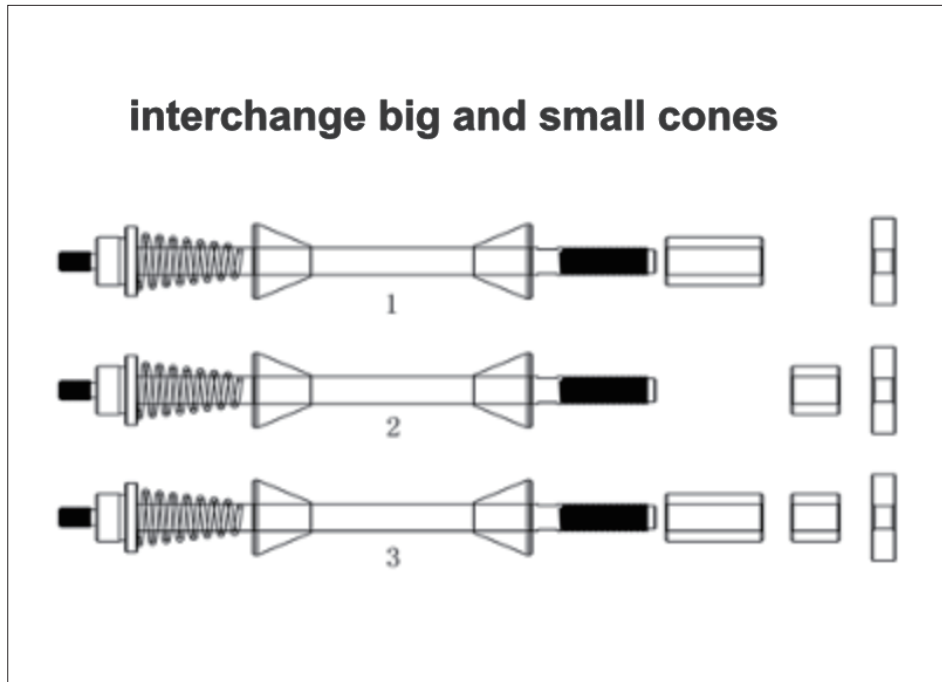

Scan the QR code to watch the installation video